

MOUNTING & LENGTH SPECIFICATIONS

Part No.	Part Type	STRUT BODY		END CODE		LENGTHS			Spring (Rate)	Parts Pack(s)
		Type	Length	Upper	Lower	Comp.	Ext.	Trav.		
34501†	Shock	—	—	S4	SPEC	10.88"	15.25"	4.38"	—	P01135
34504†	Shock	—	—	S5	LS42	10.38"	15.13"	4.75"	—	P01167
34514†	Shock	—	—	S5	XP10	9.88"	14.25"	4.38"	—	P01167
34515	Shock	—	—	LS47	LS47	16"	26.5"	10.5"	—	None
34516†	Shock	—	—	S5	LS47	10.75"	15.88"	5.13"	—	P01167
34517	Shock	—	—	XP7	LS26	15.25"	25.13"	9.88"	—	None
34518†	Shock	—	—	L1	LS26	13.75"	21.88"	8.13"	—	None
34519	Shock	—	—	XP7	LS26	16.75"	28.25"	11.5"	—	None
34520†	Shock	—	—	S5	XP12	11"	16.38"	5.38"	—	P01167
34521	Shock	—	—	LS47	LS47	16.5"	27.5"	11"	—	None
34522†	Shock	—	—	S5	LS47	14.5"	22.75"	8.25"	—	P01167
34523	Shock	—	—	S5	LS47	13.63"	20.75"	7.13"	—	P01167
34524	Shock	—	—	LS49	LS26	14.75"	24.75"	10"	—	None
34525	Shock	—	—	S5	LS92	13.63"	20.75"	7.13"	—	P01167
34526	Shock	—	—	L1	LS38	17.56"	29.63"	12.06"	—	None
34528†	Shock	—	—	LS80	LS40	16.24"	24.62"	8.38"	—	None
34529†	Shock	—	—	LS80	LS40	15.24"	22.62"	7.38"	—	None
34530†	Shock	—	—	S4	XP4	9.75"	14.02"	4.27"	—	P01136
34531	Shock	—	—	XP5	LS43	13.69"	21.57"	7.88"	—	None
34532	Shock	—	—	XP4	LS39	15.19"	24.32"	9.13"	—	None
34533†	Shock	—	—	LS92	LS92	15.43"	22.69"	7.26"	—	None
34534†	Shock	—	—	S5	LS92	14.75"	21.38"	6.63"	—	P01167
34535†	Shock	—	—	LS92	LS92	17.18"	27.69"	10.51"	—	None
34655†	Shock	—	—	S5	XP5	10.25"	14.88"	4.63"	—	P01167
34656	Shock	—	—	S4	LS26	14.38"	24.25"	9.88"	—	P01135
34657†	Shock	—	—	S4	LS39	10"	14.25"	4.25"	—	P01136
34658	Shock	—	—	S4	LS26	16"	27.5"	11.5"	—	P01136
34671†	Shock	—	—	LS26	LS26	13.63"	21.63"	8"	—	None
34672†	Shock	—	—	LS26	LS26	14.25"	23"	8.75"	—	None
34673	Shock	—	—	S4	LS43	14.25"	23.88"	9.63"	—	P01135
34674	Shock	—	—	S4	LS43	16.13"	27.38"	11.25"	—	P01136
34675	Shock	—	—	S4	XP5	10.38"	14.38"	4"	—	P01135
34676†	Shock	—	—	LS47	LS47	15.5"	23.75"	8.25"	—	None
34677†	Shock	—	—	S4	SPEC	11"	15.13"	4.13"	—	P01136
34678†	Shock	—	—	LS47	LS47	16.75"	25.5"	8.75"	—	None
34681†	Shock	—	—	LS26	LS26	14"	20.13"	6.13"	—	None
34684†	Shock	—	—	S5	L1	10.13"	15"	4.88"	—	P01167
34685	Shock	—	—	L1	LS26	16.5"	28.25"	11.75"	—	None
34686†	Shock	—	—	L1	LS26	14.25"	22.88"	8.63"	—	None
34687	Shock	—	—	L1	LS26	18"	31"	13"	—	None
34689†	Shock	—	—	S5	XP5	10.25"	15"	4.75"	—	P01167
34690†	Shock	—	—	LS47	LS47	16"	26"	10"	—	None
34692†	Shock	—	—	LS47	LS47	14.75"	23.5"	8.75"	—	None
34693†	Shock	—	—	LS47	LS47	14.38"	23"	8.63"	—	None
34694†	Shock	—	—	LS47	LS47	15"	24.13"	9.13"	—	None
34729†	Shock	—	—	S4	LS26	10"	14.63"	4.63"	—	P01135
34730	Shock	—	—	S4	LS26	10.5"	15.88"	5.38"	—	P01135
34731	Shock	—	—	L1	LS26	12.75"	20.5"	7.75"	—	None
34732†	Shock	—	—	LS26	LS26	14"	22.5"	8.5"	—	None
34733	Shock	—	—	LS26	L1	16.38"	27.25"	10.88"	—	None
34736	Shock	—	—	L1/CP1	LS36	10.38"	16"	5.63"	—	P00019
34740	Shock	—	—	—	—	—	—	—	—	—
34741†	Shock	—	—	S4	XP5	9.63"	14"	4.38"	—	P01134
34750	Shock	—	—	S4	XP8	8.88"	13.38"	4.5"	—	P01135
34754	Shock	—	—	—	—	—	—	—	—	—
34755†	Shock	—	—	LS48	LS54	14.5"	22.75"	8.25"	—	None
34756†	Shock	—	—	XP5	LS47	14"	22.75"	8.75"	—	None
34759†	Shock	—	—	S4	LS26	12.5"	19.88"	7.38"	—	P01135
34760†	Shock	—	—	S4	L1	9.88"	14.63"	4.75"	—	P01135
34761	Shock	—	—	S4	LS26	13.13"	21.75"	8.63"	—	P01135
34762†	Shock	—	—	XP7	LS47	13.88"	22.5"	8.63"	—	None

† Bumper Stop Unit. Dimension Shown at Bumper Contact

‡ Hydraulic Lockout Unit. Dimension Shown is Metal-to-Metal, Subtract Approximately 5/8" (.62) from the Extended Length for Start-of-Engagement.

MOUNTING & LENGTH SPECIFICATIONS

Part No.	Part Type	STRUT BODY		END CODE		LENGTHS			Spring (Rate)	Parts Pack(s)
		Type	Length	Upper	Lower	Comp.	Ext.	Trav.		
34763†	Shock	—	—	XP7	LS47	14.63"	23.88"	9.25"	—	None
34766†	Shock	—	—	S4	XP11	13.12"	20.25"	7.13"	—	P00941,P01136
34767†	Shock	—	—	XP7	LS47	15.25"	25.25"	10"	—	None
34769†	Shock	—	—	LS25	LS74	13.8"	21.81"	8.01"	—	None
34770	Shock	—	—	L1	LS26	16.19"	27.01"	10.82"	—	None
34771	Shock	—	—	LS39	L2	16.63"	28.5"	11.88"	—	None
34774	Shock	—	—	S4	XP10	8.5"	13"	4.5"	—	P01135
34776†	Shock	—	—	S5	LS47	9.5"	13.75"	4.25"	—	P01167
34777	Shock	—	—	LS47	LS47	15.38"	24.63"	9.25"	—	None
34778‡	Shock	—	—	S5	LS47	13.88"	21.75"	7.88"	—	P01167
34780	Shock	—	—	LS28	XP5	14.51"	23.55"	8.94"	—	None
34781	Shock	—	—	LS47	LS47	15.75"	26.13"	10.38"	—	None
34782‡	Shock	—	—	S5	LS47	14.38"	22.75"	8.38"	—	P01167
34783†	Shock	—	—	LS39	LS40	15.13"	24.63"	9.5"	—	None
34785	Shock	—	—	S4	XP14	8.72"	12.8"	4.08"	—	P01137
34786†	Shock	—	—	LS28	LS28	14.59"	22.69"	8.1"	—	None
34787†	Shock	—	—	S5	S5	14.25"	23.25"	9"	—	P01167
34788†	Shock	—	—	S4	L3	14.38"	23.25"	8.88"	—	P00120,P01167
34789†	Shock	—	—	LS39	LS39	15.34"	24.57"	9.23"	—	None
34790	Shock	—	—	S4	LS26	9.72"	14.8"	5.08"	—	P01135
34791	Shock	—	—	L1	L1	16.13"	27.25"	11.13"	—	None
34792†	Shock	—	—	S4	S4	11.5"	18.88"	7.38"	—	P01134
34793†	Shock	—	—	S4	LS26	10.13"	15"	4.88"	—	P01135
34794	Shock	—	—	S4	XP8	9.25"	13.63"	4.38"	—	P01135
34795†	Shock	—	—	LS39	LS39	16.42"	25.53"	9.11"	—	None
34796†	Shock	—	—	S4	L1	9.38"	14.25"	4.88"	—	P01135
34797†	Shock	—	—	L1	LS26	14"	22.25"	8.25"	—	None
34798†	Shock	—	—	LS77	LS39	11.38"	16.5"	5.13"	—	None
34799‡	Shock	—	—	LS77	LS39	11.75"	15.88"	4.13"	—	None
34800†	Shock	—	—	S5	XP10	9.63"	13.77"	4.14"	—	P01167
34802	Shock	—	—	L1	L1	14"	22.75"	8.75"	—	P00829
34803	Shock	—	—	L1	L1	13.25"	21"	7.75"	—	P00573
34804†	Shock	—	—	S4	XP5	13.59"	18.11"	4.52"	—	P01135,P00941
34806†	Shock	—	—	S4	LS43	14"	20.89"	6.89"	—	P01136
34807†	Shock	—	—	S4	LS38	15"	23.39"	8.39"	—	P01136
34810	Shock	—	—	S2	CLEV	13.72"	17.97"	4.25"	—	P01299
34811†	Shock	—	—	LS47	LS47	16.21"	25.32"	9.11"	—	None
34812†	Shock	—	—	LS92	LS92	15.34"	22.35"	7.01"	—	None
34813	Shock	—	—	S6	LS40	14.51"	24.07"	9.56"	—	P01167
34814	Shock	—	—	S5	LS47	14.75"	21.38"	6.63"	—	None
34815	Shock	—	—	LS52	LS47	15.18"	24.43"	9.25"	—	None
34816	Shock	—	—	LS52	LS47	14.46"	22.96"	8.5"	—	None
34817	Shock	—	—	L1/CP1	LS36	9.88"	14.63"	4.75"	—	P00019
34821	Shock	—	—	L1	LS38	14.25"	22.88"	8.63"	—	None
34822	Shock	—	—	LS37	LS37	13.88"	22.75"	8.88"	—	None
34824	Shock	—	—	L1/CP1	LS47	14"	22.88"	8.88"	—	P00019
34831	Shock	—	—	S4	XP8	8.88"	13.38"	4.5"	—	P01135
34832	Shock	—	—	LS39	L2	14.75"	24.38"	9.63"	—	None
34839	Shock	—	—	LS24	LS24	9.93"	14.63"	4.7"	—	None
34853	Shock	—	—	L2	L2	13.25"	21.13"	7.88"	—	None
34854	Shock	—	—	LS39	L2	15.63"	26.25"	10.63"	—	None
34868	Shock	—	—	S4	XP8	10"	15.5"	5.5"	—	P01135
34899	Shock	—	—	S4	LS38	9.88"	14.38"	4.5"	—	P01135
34900	Shock	—	—	S4	LS38	10.63"	15.88"	5.25"	—	P01135
34901	Shock	—	—	S4	LS38	13.75"	22.63"	8.88"	—	P01135
34904	Shock	—	—	L1	L1	11.88"	18.13"	6.25"	—	P00411
34905	Shock	—	—	L1	L1	12.63"	19.75"	7.13"	—	None
34906†	Shock	—	—	S4	LS38	10.13"	16.75"	6.63"	—	P01135
34907†	Shock	—	—	S4	LS38	13.38"	21.25"	7.88"	—	P01135
34909†	Shock	—	—	S4	S4	13.25"	22"	8.75"	—	P01134
34910	Shock	—	—	LS39	LS39	13"	20.88"	7.88"	—	None

† Bumper Stop Unit. Dimension Shown at Bumper Contact

‡ Hydraulic Lockout Unit. Dimension Shown is Metal-to-Metal, Subtract Approximately 5/8" (.62) from the Extended Length for Start-of-Engagement.

MOUNTING & LENGTH SPECIFICATIONS

Part No.	Part Type	STRUT BODY		END CODE		LENGTHS			Spring (Rate)	Parts Pack(s)
		Type	Length	Upper	Lower	Comp.	Ext.	Trav.		
34911	Shock	—	—	S4	LS38	12.38"	19.75"	7.38"	—	P01136
34912	Shock	—	—	L1/CP1	LS54	14.13"	23"	8.88"	—	P00019
34919	Shock	—	—	LS37	LS39	11.63"	18.25"	6.63"	—	P00816
34920	Shock	—	—	LS47	LS47	15.5"	26.13"	10.63"	—	None
34926	Shock	—	—	S4	L1	11.5"	18.38"	6.88"	—	P01135
34927	Shock	—	—	L1	LS26	13.5"	21.75"	8.25"	—	None
34928	Shock	—	—	S4	LS26	11.63"	18.5"	6.88"	—	P01135,P00864
34929	Shock	—	—	LS40	LS40	14.75"	24.63"	9.88"	—	None
34930	Shock	—	—	L1	LS26	14.88"	24.75"	9.88"	—	None
34934	Shock	—	—	SPEC	LS47	14.44"	24"	9.56"	—	None
34944	Shock	—	—	LS37	LS37	11.75"	18.38"	6.63"	—	P00816
34945	Shock	—	—	S4	SPEC	8.94"	13.38"	4.44"	—	P1134
34953	Shock	—	—	S4	XP5	9.38"	14.5"	5.13"	—	P01134
34954	Shock	—	—	S4	L1	11.5"	19.13"	7.63"	—	P01137
34958	Shock	—	—	L1	LS38	12.63"	20.38"	7.75"	—	P00826
34960	Shock	—	—	LS47	LS47	14.13"	22.88"	8.75"	—	None
34963	Shock	—	—	L1	LS26	14.13"	22.88"	8.75"	—	None
34964	Shock	—	—	L1	LS26	15.75"	26.38"	10.63"	—	None
34968	Shock	—	—	—	—	—	—	—	—	—
34983†	Shock	—	—	S4	XP5	9.5"	13.75"	4.25"	—	P01134
34985	Shock	—	—	XP7	LS47	16.13"	26.75"	10.63"	—	None
65101	Shock	—	—	L3	L3	12.69"	19.67"	6.98"	—	None
65102	Shock	—	—	L4	L4	16.63"	27"	10.38"	—	None
65103	Shock	—	—	L4	L4	16.38"	26.38"	10"	—	None
65104	Shock	—	—	L4	L4	14"	21.88"	7.88"	—	None
65105	Shock	—	—	LS53	S6	14"	22.88"	8.88"	—	P01482
65106	Shock	—	—	LS54	LS54	13.5"	21.38"	7.88"	—	None
65107	Shock	—	—	S6	LS54	12.88"	20.75"	7.88"	—	P01482
65108	Shock	—	—	LS54	LS54	14.5"	23.38"	8.88"	—	None
65109	Shock	—	—	LS54	LS54	14"	22.5"	8.5"	—	None
65110	Shock	—	—	LS54	LS54	15.25"	24.88"	9.63"	—	None
65111	Shock	—	—	L3	L3	17"	28.38"	11.38"	—	None
65112	Shock	—	—	L3	L3	15.13"	24.75"	9.63"	—	None
65113	Shock	—	—	L3	L3	13.31"	20.94"	7.63"	—	None
65114	Shock	—	—	L3	L3	16.13"	26.63"	10.5"	—	None
65115	Shock	—	—	S6	S6	13.13"	21.63"	8.5"	—	P01482
65116	Shock	—	—	L4	L4	15.38"	24.25"	8.88"	—	None
65118	Shock	—	—	L4	L4	16.5"	26.37"	9.87"	—	None
65119	Shock	—	—	LS54	LS54	13.06"	20.45"	7.39"	—	None
65120	Shock	—	—	LS54	LS54	16.1"	26.51"	10.41"	—	None
65121	Shock	—	—	LS54	LS54	14"	22.5"	8.5"	—	None
65122	Shock	—	—	L3	L3	18.75"	32"	13.25"	—	None
65123	Shock	—	—	LS54	LS54	14.88"	24.25"	9.38"	—	None
65124	Shock	—	—	LS54	LS54	15.5"	24.5"	9"	—	None
65128	Shock	—	—	LS62	L3	16.13"	25.5"	9.38"	—	None
65138	Shock	—	—	LS59	LS60	17.25"	28.25"	11"	—	None
65139	Shock	—	—	LS86	LS86	14.5"	22.75"	8.25"	—	None
65140	Shock	—	—	LS86	LS86	14.38"	22.5"	8.13"	—	None
65141	Shock	—	—	LS54	LS54	13.5"	21.38"	7.88"	—	None
65142	Shock	—	—	LS26	LS26	17"	28.13"	11.13"	—	None
65143	Shock	—	—	LS53	LS53	13.22"	20.28"	7.06"	—	None
65144	Shock	—	—	LS53	LS53	13.22"	20.28"	7.06"	—	None
65145	Shock	—	—	LS53	LS53	13.22"	20.28"	7.06"	—	None
65146	Shock	—	—	LS53	LS53	16.44"	23.36"	6.92"	—	None
65147	Shock	—	—	LS53	LS54	13"	20.25"	7.25"	—	None
65148	Shock	—	—	LS86	LS86	14.63"	22.75"	8.13"	—	None
65153	Shock	—	—	S6	LS54	13.5"	21.5"	8"	—	P01482
65155	Shock	—	—	LS53	LS53	13.25"	20.31"	7.06"	—	None
65156	Shock	—	—	LS71	LS54	15.53"	25.34"	9.81"	—	None
65157	Shock	—	—	LS53	LS54	13.19"	20.73"	7.54"	—	None
65158	Shock	—	—	LS53	LS54	13.19"	20.73"	7.54"	—	None

† Bumper Stop Unit. Dimension Shown at Bumper Contact

‡ Hydraulic Lockout Unit. Dimension Shown is Metal-to-Metal, Subtract Approximately 5/8" (.62) from the Extended Length for Start-of-Engagement.

MOUNTING & LENGTH SPECIFICATIONS

Part No.	Part Type	STRUT BODY		END CODE		LENGTHS			Spring (Rate)	Parts Pack(s)
		Type	Length	Upper	Lower	Comp.	Ext.	Trav.		
65159	Shock	—	—	LS87	L4	15.88"	25.88"	10"	—	None
65160	Shock	—	—	LS53	S6	13.88"	22.56"	8.69"	—	P01482
65161	Shock	—	—	S6	S6	16.94"	29.25"	12.31"	—	P01482
65162	Shock	—	—	LS86	LS86	13.66"	21.41"	7.75"	—	None
65164	Shock	—	—	S5	LS43	14.75"	22.97"	8.22"	—	P01167
65165	Shock	—	—	LS47	LS47	15"	23.13"	8.13"	—	None
65166	Shock	—	—	LS68	LS54	15.56"	25.2"	9.64"	—	None
65167	Shock	—	—	S5	LS47	13.38"	20.88"	7.5"	—	P01167
65168	Shock	—	—	L1	LS26	15.06"	24.31"	9.25"	—	None
65169	Shock	—	—	S6	S6	13.99"	23.38"	9.39"	—	P01482
65171	Shock	—	—	LS53	LS54	19.13"	25.75"	6.63"	—	None
65172	Shock	—	—	LS47	LS47	13.5"	21.5"	8"	—	None
65173	Shock	—	—	S6	S6	11.13"	17.75"	6.63"	—	P01482
65174†	Shock	—	—	L1	LS26	17.06"	28.44"	11.38"	—	None
65175	Shock	—	—	LS87	LS80	13.19"	20.63"	7.44"	—	None
65176	Shock	—	—	LS87	LS80	13.16"	20.63"	7.47"	—	None
65178	Shock	—	—	LS53	LS53	14.52"	22.79"	8.27"	—	None
65179	Shock	—	—	LS53	LS54	14.63"	23.61"	8.97"	—	None
65180	Shock	—	—	LS53	LS54	16.65"	27.15"	10.47"	—	None
65181†	Shock	—	—	LS80	LS80	15.63"	24.01"	8.38"	—	None
65183	Shock	—	—	LS70	LS70	17.14"	26.45"	9.31"	—	None
65184	Shock	—	—	LS70	LS54	13.8"	21.07"	7.27"	—	None
65185	Shock	—	—	LS70	LS54	14.52"	22.67"	8.15"	—	None
65400‡	Shock	—	—	S6	L4	17.38"	26.75"	9.38"	—	P01482
65401‡	Shock	—	—	LS54	LS54	17.88"	29.56"	11.69"	—	None
65402‡	Shock	—	—	S6	L4	15.06"	24.06"	9"	—	P01482
65403	Shock	—	—	LS54	LS54	16.54"	26.8"	10.26"	—	None
65404‡	Shock	—	—	S6	S6	12.01"	18.79"	6.78"	—	P01482
65405‡	Shock	—	—	L3	L3	13.13"	20.07"	6.02"	—	P01009
65406‡	Shock	—	—	L3	L3	17.38"	28"	10.63"	—	P01009
65407‡	Shock	—	—	L4	L4	15.45"	24.16"	8.7"	—	None
65408‡	Shock	—	—	S6	LS71	14.13"	21.75"	7.63"	—	P01482
65409‡	Shock	—	—	LS53	LS53	15.75"	24.75"	9"	—	None
65410‡	Shock	—	—	L4	L4	12.26"	17.82"	5.56"	—	None
65411‡	Shock	—	—	LS54	LS54	16.38"	26.5"	10.13"	—	None
65412‡	Shock	—	—	LS54	LS54	15.75"	25.22"	9.47"	—	None
65413‡	Shock	—	—	S6	S6	14.63"	23.38"	8.75"	—	P01482
65414‡	Shock	—	—	S6	S6	14.63"	23.38"	8.75"	—	P01482
65415‡	Shock	—	—	L3	L3	16.88"	26.75"	9.88"	—	None
65416‡	Shock	—	—	LS54	LS54	11.99"	17.75"	5.76"	—	None
65417‡	Shock	—	—	LS65	LS65	11.63"	14.75"	3.13"	—	None
65418‡	Shock	—	—	LS54	LS54	13.98"	21.75"	7.77"	—	None
65419‡	Shock	—	—	LS54	LS54	11.63"	17"	5.38"	—	None
65420‡	Shock	—	—	LS54	LS54	18.09"	29.98"	11.89"	—	None
65421‡	Shock	—	—	LS54	LS54	15.53"	24.84"	9.31"	—	None
65425‡	Shock	—	—	S6	LS54	12.99"	20.2"	7.21"	—	P01482
65427‡	Shock	—	—	LS54	LS54	19.06"	31.91"	12.85"	—	None
65428‡	Shock	—	—	LS54	LS54	16.32"	26.31"	9.99"	—	None
65429‡	Shock	—	—	L3	L3	15.88"	24.75"	8.88"	—	None
65430‡	Shock	—	—	L4	L4	13.32"	19.9"	6.58"	—	None
65431‡	Shock	—	—	LS54	LS54	15.31"	24.31"	9"	—	None
65432‡	Shock	—	—	LS54	LS54	13.69"	21.08"	7.39"	—	None
65433‡	Shock	—	—	LS54	LS54	13.59"	20.61"	7.02"	—	None
65434‡	Shock	—	—	L3	L3	13.58"	20.86"	7.28"	—	None
65435‡	Shock	—	—	L4	L4	17.88"	28.25"	10.38"	—	None
65436‡	Shock	—	—	S6	S6	11.38"	16.88"	5.5"	—	P01482
65439‡	Shock	—	—	L4	L4	15.13"	21.5"	6.38"	—	None
65440‡	Shock	—	—	S6	L4	16.13"	24.25"	8.13"	—	P01482
65442‡	Shock	—	—	L4	L4	16.98"	26.25"	9.27"	—	None
65444‡	Shock	—	—	S6	L4	14.97"	23.81"	8.84"	—	P01482
65448‡	Shock	—	—	L4	L4	16.98"	26.2"	9.22"	—	None

† Bumper Stop Unit. Dimension Shown at Bumper Contact

‡ Hydraulic Lockout Unit. Dimension Shown is Metal-to-Metal, Subtract Approximately 5/8" (.62) from the Extended Length for Start-of-Engagement.

MOUNTING & LENGTH SPECIFICATIONS

Part No.	Part Type	STRUT BODY		END CODE		LENGTHS			Spring (Rate)	Parts Pack(s)
		Type	Length	Upper	Lower	Comp.	Ext.	Trav.		
65449†	Shock	—	—	L4	L4	15.75"	23.48"	7.73"	—	None
65451†	Shock	—	—	LS54	LS54	13.38"	20.36"	6.99"	—	None
65453†	Shock	—	—	LS54	LS54	16.95"	27.6"	10.65"	—	None
65455†	Shock	—	—	L4	L4	14.38"	21.38"	7"	—	None
65456†	Shock	—	—	L4	L4	20.25"	32.88"	12.63"	—	None
65458†	Shock	—	—	LS54	LS54	12.25"	17.63"	5.38"	—	None
65459†	Shock	—	—	LS54	LS54	17.38"	28.44"	11.06"	—	None
65463†	Shock	—	—	L4	L4	19.3"	31.97"	12.67"	—	None
65465†	Shock	—	—	LS54	LS54	10.34"	14.33"	3.98"	—	None
65466†	Shock	—	—	LS54	LS54	15.74"	25.19"	9.45"	—	None
65468†	Shock	—	—	S6	S6	15.63"	26"	10.38"	—	P01482
65472†	Shock	—	—	L4	S6	15.13"	23.7"	8.58"	—	P01482
65474†	Shock	—	—	L4	L4	13.63"	20"	6.38"	—	None
65475†	Shock	—	—	LS53	S6	17.25"	28"	10.75"	—	P01482
65478†	Shock	—	—	LS54	LS54	15.02"	23.75"	8.73"	—	None
65479†	Shock	—	—	LS54	LS54	15.75"	25.22"	9.47"	—	None
65480†	Shock	—	—	LS54	S6	15.97"	26.1"	10.13"	—	P01482
65481†	Shock	—	—	LS54	LS54	16.51"	26.71"	10.2"	—	None
65482†	Shock	—	—	LS54	LS54	17.43"	28.45"	11.02"	—	None
65483†	Shock	—	—	LS75	LS75	18.13"	29.5"	11.38"	—	None
65484†	Shock	—	—	LS54	LS54	18.12"	30"	11.88"	—	None
65485†	Shock	—	—	LS54	LS54	18.76"	31.25"	12.49"	—	None
65486†	Shock	—	—	LS61	LS62	15.63"	24.98"	9.36"	—	None
65487†	Shock	—	—	LS53	LS53	15.5"	24.74"	9.24"	—	None
65488†	Shock	—	—	LS53	LS53	17.96"	26.54"	8.59"	—	None
65489†	Shock	—	—	LS59	LS60	13.5"	19.5"	6"	—	None
65490†	Shock	—	—	LS59	LS60	15"	22.91"	7.91"	—	None
65492†	Shock	—	—	LS61	LS61	14.5"	22.5"	8"	—	None
65493†	Shock	—	—	LS54	LS54	12.08"	17.18"	5.1"	—	None
65494†	Shock	—	—	LS61	LS62	15.5"	24.81"	9.31"	—	None
65495†	Shock	—	—	LS87	LS80	18.36"	30.5"	12.14"	—	None
65497†	Shock	—	—	LS53	LS53	13.15"	18.31"	5.16"	—	None
65499†	Shock	—	—	LS53	LS54	18.65"	25.37"	6.71"	—	None
65500†	Shock	—	—	LS54	LS54	11.86"	17.5"	5.64"	—	None
65501†	Shock	—	—	LS54	LS54	11.78"	17.34"	5.56"	—	None
65502†	Shock	—	—	LS54	LS54	10.99"	15.75"	4.76"	—	None
65503†	Shock	—	—	LS54	LS54	14.3"	22.13"	7.83"	—	None
65504†	Shock	—	—	LS54	LS87	15.17"	24.13"	8.95"	—	P01471
65505†	Shock	—	—	LS75	LS75	17.4"	28.53"	11.13"	—	None
65506†	Shock	—	—	LS54	LS75	15.75"	25.22"	9.47"	—	None
65507†	Shock	—	—	LS62	S6	13.77"	21.86"	8.09"	—	P01482
65508†	Shock	—	—	LS62	S6	14.8"	23.92"	9.13"	—	P01482
65509†	Shock	—	—	LS54	LS54	9.13"	12.06"	2.94"	—	None
65510†	Shock	—	—	LS54	LS54	9.75"	13.25"	3.5"	—	None
65511†	Shock	—	—	LS54	LS54	10.34"	14.5"	4.16"	—	None
65512†	Shock	—	—	LS54	LS54	11.06"	15.91"	4.85"	—	None
65513†	Shock	—	—	LS54	LS54	12.96"	19.5"	6.54"	—	None
65514†	Shock	—	—	LS54	LS54	16.19"	25.92"	9.73"	—	None
65519†	Shock	—	—	LS54	LS54	13.3"	20.06"	6.77"	—	None
65522†	Shock	—	—	LS53	LS53	17.41"	28.59"	11.19"	—	None
65523†	Shock	—	—	SPEC	S6	12.75"	19.75"	7"	—	P01482
65524†	Shock	—	—	LS87	S6	11.8"	17.86"	6.06"	—	P01482
65525†	Shock	—	—	LS102	LS102	10.84"	15.25"	4.41"	—	None
65526†	Shock	—	—	LS59	LS86	18.63"	30.69"	12.06"	—	None
65527†	Shock	—	—	LS53	LS86	13.8"	21.25"	7.45"	—	None
65528†	Shock	—	—	S6	S6	15.94"	26.31"	10.38"	—	P01482
65529†	Shock	—	—	LS59	LS86	15.91"	25.39"	9.49"	—	None
65530	Shock	—	—	LS69	LS86	14.02"	21.36"	7.34"	—	None
65531	Shock	—	—	L4	L4	10.51"	14.13"	3.62"	—	None
65532	Shock	—	—	LS69	LS87	15.17"	23.57"	8.95"	—	None
65533†	Shock	—	—	LS53	LS53	15.06"	23.67"	8.61"	—	None

† Bumper Stop Unit. Dimension Shown at Bumper Contact

‡ Hydraulic Lockout Unit. Dimension Shown is Metal-to-Metal, Subtract Approximately 5/8" (.62) from the Extended Length for Start-of-Engagement.

MOUNTING & LENGTH SPECIFICATIONS

Part No.	Part Type	STRUT BODY		END CODE		LENGTHS			Spring (Rate)	Parts Pack(s)
		Type	Length	Upper	Lower	Comp.	Ext.	Trav.		
65534‡	Shock	—	—	S6	L4	15.81"	23.96"	8.15"	—	P01482
65535‡	Shock	—	—	LS53	LS54	13.47"	20.68"	7.21"	—	None
65536	Shock	—	—	LS69	LS61	15.22"	24.18"	8.96"	—	None
65537	Shock	—	—	LS69	LS87	14.09"	21.94"	7.85"	—	None
65538	Shock	—	—	LS69	LS61	14.86"	23.38"	8.52"	—	None
65539	Shock	—	—	LS69	LS87	14.56"	22.89"	8.3"	—	None
65541	Shock	—	—	LS95	LS95	13.78"	21.31"	7.53"	—	None
65542	Shock	—	—	LS75	LS75	13.93"	21.65"	7.72"	—	None
65543‡	Shock	—	—	LS61	LS98	14.66"	22.81"	8.15"	—	None
65546	Shock	—	—	LS83	LS84	13.78"	21.3"	7.52"	—	None
65547	Shock	—	—	LS80	LS52	15.65"	24.61"	8.96"	—	None
66101	Shock	—	—	LS80	LS80	7.56"	9.96"	2.4"	—	None
66102	Shock	—	—	LS79	LS79	8.56"	11.96"	3.4"	—	None
66104	Shock	—	—	LS14	LS14	7.25"	9.38"	2.13"	—	None
66105	Shock	—	—	LS39	LS41	7.88"	10.88"	3"	—	None
66108	Shock	—	—	LS89	LS44	8.38"	10.25"	1.88"	—	None
66109	Shock	—	—	LS77	LS77	8"	9.38"	1.38"	—	None
66112	Shock	—	—	LS76	LS76	8.25"	11"	2.75"	—	None
66115	Shock	—	—	LS29	S4	8.25"	11.38"	3.13"	—	P01135
66116	Shock	—	—	LS79	S4	8.63"	10.38"	1.75"	—	P01135
66117†	Shock	—	—	LS37	S4	7.91"	9.41"	1.5"	—	P01135
66118	Shock	—	—	LS84	L1	8.33"	10.33"	2"	—	None
66120	Shock	—	—	LS23	LS23	6.5"	8.5"	2"	—	None
66121	Shock	—	—	LS84	L1	9.71"	11.82"	2.11"	—	None
66122	Shock	—	—	LS84	L1	8.33"	10.33"	2"	—	None
66123	Shock	—	—	LS79	LS80	7.25"	9.38"	2.13"	—	None
66124	Shock	—	—	LS96	LS97	8.63"	10.38"	1.75"	—	None
66125	Shock	—	—	LS98	LS80	9.96"	12.82"	2.88"	—	None
66126	Shock	—	—	LS14	LS14	7.36"	9.38"	2.02"	—	None
66138†	Shock	—	—	L3	L3	19.72"	32.73"	13.02"	—	None
66142†	Shock	—	—	LS33	LS33	8.33"	10.33"	2"	—	None
66143	Shock	—	—	L1	L1	11.75"	18.7"	6.95"	—	P00019
66145	Shock	—	—	LS79	LS79	9.13"	13.13"	4"	—	None
66147	Shock	—	—	LS77	LS77	8.63"	10.38"	1.75"	—	None
66149	Shock	—	—	LS37	LS37	9.25"	14"	4.75"	—	None
66157	Shock	—	—	XP7	S4	7.13"	9.75"	2.63"	—	P01134
66159	Shock	—	—	LS24	LS24	8.47"	11.58"	3.09"	—	None
66160	Shock	—	—	LS77	LS77	7.63"	9.88"	2.25"	—	None
66161	Shock	—	—	LS77	LS77	8.13"	10.88"	2.75"	—	None
66162	Shock	—	—	LS73	LS73	6.38"	7.88"	1.5"	—	None
66178	Shock	—	—	LS14	LS72	6.63"	8.38"	1.75"	—	None
66182	Shock	—	—	XP7	S4	5.75"	7.38"	1.63"	—	P01098
66189	Shock	—	—	XP8	S4	8.75"	10.88"	2.13"	—	P01134
66193	Shock	—	—	LS8	LS8	7.38"	9.75"	2.38"	—	None
66195	Shock	—	—	LS4	LS4	10.5"	14"	3.5"	—	None
66196†	Shock	—	—	LS37	S4	10.12"	13.84"	3.72"	—	P01136
66201	Shock	—	—	LS77	LS34	9.6"	13.42"	3.82"	—	None
66202	Shock	—	—	LS77	S6	9.32"	12.85"	3.53"	—	P01482
66203	Shock	—	—	LS98	LS80	9.23"	12.26"	3.03"	—	None
66204‡	Shock	—	—	LS14	LS14	8.64"	11.43"	2.79"	—	None
66205†	Shock	—	—	LS53	LS80	9.2"	10.76"	1.5"	—	None
66206†	Shock	—	—	LS37	L1	9.56"	12.73"	3.17"	—	None
66402	Shock	—	—	LS54	LS53	15.63"	25.13"	9.5"	—	None
66403	Shock	—	—	LS71	S6	12.88"	20.88"	8"	—	P01482
66405	Shock	—	—	LS71	S6	11.88"	18.88"	7"	—	P01482
66407‡	Shock	—	—	S6	LS54	13.88"	22.19"	8.31"	—	P01482
66408	Shock	—	—	LS39	LS39	12.55"	19.99"	7.44"	—	None
66409‡	Shock	—	—	LS53	LS39	15.16"	24.05"	8.89"	—	None
66412	Shock	—	—	LS53	LS53	11.67"	18.12"	6.45"	—	None
66413	Shock	—	—	L3	L3	12.17"	19.13"	6.95"	—	None
66414	Shock	—	—	LS47	LS47	12.92"	20.63"	7.7"	—	None

† Bumper Stop Unit. Dimension Shown at Bumper Contact

‡ Hydraulic Lockout Unit. Dimension Shown is Metal-to-Metal, Subtract Approximately 5/8" (.62) from the Extended Length for Start-of-Engagement.

MOUNTING & LENGTH SPECIFICATIONS

Part No.	Part Type	STRUT BODY		END CODE		LENGTHS			Spring (Rate)	Parts Pack(s)
		Type	Length	Upper	Lower	Comp.	Ext.	Trav.		
66415	Shock	—	—	LS47	LS28	12.99"	20.81"	7.82"	—	None
66417	Shock	—	—	LS48	LS43	12.69"	20.22"	7.53"	—	None
66419†	Shock	—	—	LS61	LS61	14.44"	22.63"	8.19"	—	None
66420	Shock	—	—	LS44	LS44	12.73"	19.51"	6.77"	—	None
66422‡	Shock	—	—	LS53	LS53	13.28"	20.31"	7.03"	—	None
66423	Shock	—	—	L4	L4	16.27"	26.72"	10.45"	—	None
66424‡	Shock	—	—	S6	S6	12.05"	18.8"	6.75"	—	P01482
66428‡	Shock	—	—	S6	L4	16.61"	27.38"	10.77"	—	P01482
66429‡	Shock	—	—	S6	L4	14.98"	23.99"	9.01"	—	P01482
66431‡	Shock	—	—	LS61	LS62	15.69"	25.06"	9.38"	—	None
66433‡	Shock	—	—	LS86	LS86	14.72"	22.88"	8.16"	—	None
66436‡	Shock	—	—	LS87	LS80	18.31"	30.45"	12.14"	—	None
66437	Shock	—	—	LS54	LS54	14.05"	22.58"	8.76"	—	None
66438‡	Shock	—	—	LS54	LS54	11.05"	16.07"	5.02"	—	None
66439†	Shock	—	—	LS46	LS30	15.93"	25.96"	10.03"	—	None
66440	Shock	—	—	LS51	LS51	12.38"	19.73"	7.35"	—	None
66442	Shock	—	—	LS54	LS54	10.72"	15.4"	4.68"	—	None
66443	Shock	—	—	LS54	LS54	10.94"	15.71"	4.77"	—	None
66444†	Shock	—	—	L1	L1	13.48"	18.55"	5.07"	—	None
66445	Shock	—	—	LS54	LS54	12.07"	19.4"	7.33"	—	None
66446	Shock	—	—	LS54	LS54	13.07"	21.4"	8.33"	—	None
66447†	Shock	—	—	LS53	LS38	18.4"	31"	12.5"	—	None
66448	Shock	—	—	LS54	LS54	14.45"	22.86"	8.41"	—	None
66449	Shock	—	—	LS51	LS51	12.38"	19.73"	7.35"	—	None
66450	Shock	—	—	LS43	LS28	12.41"	19.87"	7.46"	—	None
66451	Shock	—	—	LS46	LS30	15.93"	25.96"	10.03"	—	None
66452†	Shock	—	—	LS46	LS30	15.93"	25.96"	10.03"	—	None
66453	Shock	—	—	LS78	LS78	14.48"	21.9"	7.42"	—	None
66454	Shock	—	—	LS54	LS54	15.66"	25.4"	9.74"	—	None
66455	Shock	—	—	LS54	LS54	15.66"	25.4"	9.74"	—	None
66456	Shock	—	—	LS38	LS38	15.34"	23.74"	8.4"	—	None
66457	Shock	—	—	LS43	LS28	14.28"	22.14"	7.86"	—	None
66502†	Steering Damper	—	—	LS54	LS54	14.05"	22.58"	8.53"	—	None
66504	Steering Damper	—	—	LB1	LB1	13.94"	22.47"	8.53"	—	None
66505†	Steering Damper	—	—	LS54	LS54	16.98"	28.56"	11.58"	—	None
66506	Steering Damper	—	—	LS89	LS89	13.9"	22.68"	8.78"	—	None
66601	Shock	—	—	S4	LS82	13.5"	22.88"	9.38"	—	P01136
66602	Shock	—	—	S4	L1	12.5"	20.88"	8.38"	—	P01134
66603	Shock	—	—	S5	S5	12.25"	20.13"	7.88"	—	P01167
66605	Shock	—	—	S5	S5	12.86"	21.39"	8.53"	—	P01303
66606‡	Shock	—	—	LS53	LS53	17.06"	27.17"	10.11"	—	None
66607‡	Shock	—	—	LS54	LS54	9.94"	13.47"	3.53"	—	None
66608‡	Shock	—	—	LS54	LS54	11.69"	16.83"	5.14"	—	None
66609	Shock	—	—	LS54	S6	13.38"	21.75"	8.38"	—	P01482
66610‡	Shock	—	—	LS54	LS54	12.58"	18.7"	6.13"	—	None
66613‡	Shock	—	—	LS54	LS54	17.06"	27.04"	9.98"	—	None
66615	Shock	—	—	LS71	S6	13.63"	22.25"	8.63"	—	P01482
66618	Shock	—	—	L3	L3	13.38"	21.5"	8.13"	—	None
66624	Shock	—	—	L3	L3	15.5"	25.63"	10.13"	—	None
66626	Shock	—	—	S6	S6	15.13"	25.88"	10.75"	—	P01482
66627‡	Shock	—	—	LS54	LS54	10.44"	14.45"	4.02"	—	None
66628	Shock	—	—	S6	S6	16.88"	29.5"	12.63"	—	P01482
66629	Shock	—	—	L3	L3	18.63"	32.13"	13.5"	—	P00119
66633‡	Shock	—	—	LS54	LS54	13.81"	21.2"	7.39"	—	None
66634‡	Shock	—	—	LS54	LS54	12.19"	17.86"	5.67"	—	None
66636‡	Shock	—	—	LS54	LS54	13.44"	20.45"	7.02"	—	None
66637	Shock	—	—	L1/CP5	LS54	14.13"	23"	8.88"	—	P00019
66638‡	Shock	—	—	LS54	LS54	16.69"	26.83"	10.14"	—	None
66639	Shock	—	—	S4	L1	13.25"	22"	8.75"	—	P01136
66646	Shock	—	—	L3	L3	15.25"	25"	9.75"	—	P00119
66648	Shock	—	—	LS54	S6	13.71"	21.35"	7.64"	—	P01482

† Bumper Stop Unit. Dimension Shown at Bumper Contact

‡ Hydraulic Lockout Unit. Dimension Shown is Metal-to-Metal, Subtract Approximately 5/8" (.62) from the Extended Length for Start-of-Engagement.

MOUNTING & LENGTH SPECIFICATIONS

Part No.	Part Type	STRUT BODY		END CODE		LENGTHS			Spring (Rate)	Parts Pack(s)
		Type	Length	Upper	Lower	Comp.	Ext.	Trav.		
66653	Shock	—	—	S4	L3	13.96"	23.25"	9.29"	—	P01134
66656†	Shock	—	—	LS54	S6	14.47"	22.97"	8.5"	—	P01482
66658‡	Shock	—	—	S6	LS54	15.05"	24.07"	9.02"	—	P01482
66660‡	Shock	—	—	LS54	L4	12.72"	19.21"	6.49"	—	None
66666	Shock	—	—	LS38	LS38	13.88"	22.88"	9"	—	None
66668	Shock	—	—	L3	L3	15.72"	26"	10.28"	—	P00119
66671	Shock	—	—	LS54	LS54	16"	26.75"	10.75"	—	None
66675	Shock	—	—	S5	L3	13.38"	22"	8.63"	—	P01167
66683‡	Shock	—	—	LS53	LS53	15.31"	24.07"	8.76"	—	None
66684	Shock	—	—	L4	L4	14.89"	24.09"	9.2"	—	None
66691	Shock	—	—	LS41	LS53	15"	24"	9"	—	P01322
66692	Shock	—	—	LS71	S6	13.75"	22.63"	8.88"	—	P01482
66697	Shock	—	—	LS54	LS40	14.63"	24.25"	9.63"	—	None
66707	Shock	—	—	L4	L4	16.02"	25.47"	9.45"	—	None
66710‡	Shock	—	—	LS54	LS54	18.06"	29.7"	11.64"	—	None
66713	Shock	—	—	S5	LS75	18.25"	31.88"	13.63"	—	P01167
66714	Shock	—	—	L3	L3	14.38"	23.38"	9"	—	P00119,P00936
66715	Shock	—	—	LS80	S6	14.13"	23.13"	9"	—	P01482
66717	Shock	—	—	S4	L3	14.25"	23.42"	9.17"	—	P01134,P00120,P00936
66719	Shock	—	—	LS54	LS54	19.38"	33.5"	14.13"	—	None
66810	Shock	—	—	L2	L2	17.5"	30.25"	12.75"	—	None
66811	Shock	—	—	L3	L3	16.17"	26.56"	10.39"	—	P00119
66828	Shock	—	—	L3	L3	13.13"	21.13"	8"	—	P00575
66829	Shock	—	—	S4	S4	11.5"	18.75"	7.25"	—	P01136
66833‡	Shock	—	—	LS54	LS54	15.81"	25.2"	9.39"	—	None
66841	Shock	—	—	L3	L3	14.38"	23.5"	9.13"	—	P00575
66858	Shock	—	—	L2	L2	12"	19.25"	7.25"	—	None
66859	Shock	—	—	L2	L2	16.13"	27.13"	11"	—	None
66860†	Shock	—	—	L3	L3	15.16"	24.56"	9.41"	—	P00119
66861†	Shock	—	—	L3	L3	17.31"	28.69"	11.38"	—	None
66863	Shock	—	—	L3	L3	18"	30.75"	12.75"	—	P00119
66864	Shock	—	—	L4	L4	17.68"	28.8"	11.12"	—	None
66878	Shock	—	—	LS54	LS54	14.56"	23.91"	9.34"	—	None
66884‡	Shock	—	—	LS54	LS54	17.19"	27.95"	10.77"	—	None
66886‡	Shock	—	—	LS54	LS54	13.95"	21.86"	7.91"	—	None
66891	Shock	—	—	L4	L4	16.3"	26.72"	10.42"	—	None
66893‡	Shock	—	—	LS54	LS54	11.94"	17.45"	5.52"	—	None
66897‡	Shock	—	—	LS54	LS54	15.44"	24.33"	8.89"	—	None
66902	Shock	—	—	L1	L1	14.13"	23.88"	9.75"	—	None
66903	Shock	—	—	S4	S4	12.75"	21.75"	9"	—	P01134
66913	Shock	—	—	L1/CP5	LS54	15"	24.88"	9.88"	—	P00019
66921	Shock	—	—	S5	S5	13.5"	23.63"	10.13"	—	P01303
66923	Shock	—	—	S5	S5	14"	24.13"	10.13"	—	P01303
66924	Shock	—	—	S5	LS53	16.13"	27.5"	11.38"	—	P01303
66956‡	Shock	—	—	LS53	LS53	15.73"	25.41"	9.68"	—	None
66957‡	Shock	—	—	L4	L4	15.28"	23.69"	8.41"	—	None
66966	Shock	—	—	L4	S6	15.5"	25.25"	9.75"	—	P01482
66969‡	Shock	—	—	LS54	LS54	15.43"	24.45"	9.02"	—	None
74006	Shock	—	—	L4	L4	14.29"	21.75"	7.46"	—	None
74025	Shock	—	—	L4	L4	15.62"	24.52"	8.9"	—	None
74028	Shock	—	—	L4	L4	14.72"	22.74"	8.02"	—	None
74075	Shock	—	—	L4	L4	13.25"	19.88"	6.63"	—	None
74400‡	Shock	—	—	L4	L4	16.88"	25.75"	8.88"	—	None
74402‡	Shock	—	—	S6	L4	15.88"	24.13"	8.25"	—	P01482
74405‡	Shock	—	—	L4	L4	12.76"	17.82"	5.06"	—	None
74406‡	Shock	—	—	L4	L4	14.23"	20.84"	6.61"	—	None
74408‡	Shock	—	—	L4	L4	15.71"	23.49"	7.81"	—	None
74409‡	Shock	—	—	S6	S6	12.31"	18.7"	6.39"	—	P01482
74413‡	Shock	—	—	L4	L4	17"	26.31"	9.31"	—	None
74417‡	Shock	—	—	S6	L4	15.39"	23.97"	8.58"	—	P01482
74418‡	Shock	—	—	S6	S6	19.02"	31.83"	12.81"	—	P01482

† Bumper Stop Unit. Dimension Shown at Bumper Contact

‡ Hydraulic Lockout Unit. Dimension Shown is Metal-to-Metal, Subtract Approximately 5/8" (.62) from the Extended Length for Start-of-Engagement.

MOUNTING & LENGTH SPECIFICATIONS

Part No.	Part Type	STRUT BODY		END CODE		LENGTHS			Spring (Rate)	Parts Pack(s)
		Type	Length	Upper	Lower	Comp.	Ext.	Trav.		
74420†	Shock	—	—	LS53	LS53	16.58"	25.48"	8.91"	—	None
74423†	Shock	—	—	L4	L4	13.67"	20.08"	6.41"	—	None
74431†	Shock	—	—	LS81	S6	18.73"	31.11"	12.38"	—	P01482
74432†	Shock	—	—	LS81	S6	16.63"	26.38"	9.75"	—	P01482
74434†	Shock	—	—	S6	L4	16.25"	25.88"	9.63"	—	P01482
74435†	Shock	—	—	LS65	LS65	15.08"	23.24"	8.16"	—	None
74439†	Shock	—	—	S6	S6	14.8"	23.88"	9.08"	—	None
74440†	Shock	—	—	LS65	S6	13.72"	21.08"	7.36"	—	P01482
74442†	Shock	—	—	S6	S6	17.63"	29.56"	11.94"	—	None
74450†	Shock	—	—	S6	S6	13.39"	21.94"	8.55"	—	None
74451†	Shock	—	—	S6	L4	15.69"	24.94"	9.25"	—	P01482
74454†	Shock	—	—	L4	L4	16.75"	26.41"	9.66"	—	None
74457†	Shock	—	—	S6	S6	13.19"	21.54"	8.35"	—	None
74461†	Shock	—	—	LS65	LS65	15.94"	24.59"	8.66"	—	None
74462†	Shock	—	—	S6	S6	13.66"	22.48"	8.82"	—	None
74465†	Shock	—	—	S6	S6	13.02"	20.06"	7.04"	—	None
74466†	Shock	—	—	S6	S6	16.49"	27.4"	10.92"	—	None
74467†	Shock	—	—	LS65	S6	12.86"	20.06"	7.2"	—	None
74468†	Shock	—	—	LS54	LS54	17.47"	28.54"	11.07"	—	None
74469†	Shock	—	—	LS54	LS54	13.97"	21.85"	7.88"	—	None
74470†	Shock	—	—	LS65	LS65	13.5"	19.9"	6.4"	—	None
74471†	Shock	—	—	L4	L4	15.46"	23.37"	7.91"	—	None
74472†	Shock	—	—	L4	L4	15.88"	24.5"	8.62"	—	None
74474†	Shock	—	—	LS54	LS54	15.82"	24.6"	8.78"	—	None
74476†	Shock	—	—	S6	S6	13.26"	20.94"	7.68"	—	None
74477†	Shock	—	—	LS61	LS62	17.24"	27.43"	10.19"	—	None
74479†	Shock	—	—	LS54	LS54	12.83"	18.71"	5.87"	—	None
153026	Complete Strut Assembly	SS7	13.39"	S1	XP16	13.9"	17.13"	3.25"	—	P01577
153027	Complete Strut Assembly	SS7	13.12"	S1	SPEC	14.51"	18.06"	3.55"	—	P01577
153028	Complete Strut Assembly	SS5	14.84"	—	—	15.43"	21.19"	5.76"	—	P01141
153029	Complete Strut Assembly	SS5	14.84"	—	—	15.43"	21.19"	5.76"	—	P01141
153030	Complete Strut Assembly	SS3	16.6"	—	—	17.17"	21.64"	4.47"	—	P01141
153031	Complete Strut Assembly	SS3	16.88"	—	—	17.3"	21.63"	4.33"	—	P01101
153032L	Complete Strut Assembly	SS3	17.26"	—	—	17.76"	23.52"	5.76"	—	P01123
153032R	Complete Strut Assembly	SS3	17.26"	—	—	17.76"	23.52"	5.76"	—	P01123
550010†	Shock	—	—	S4	XP4	9.38"	13.75"	4.38"	—	P01136
550011†	Shock	—	—	S4	L1	12.38"	20"	7.63"	—	P01136,P00576
550012	Shock	—	—	S4	XP4	9.38"	14.25"	4.88"	—	P01134
550013†	Shock	—	—	XP7	L1	13.25"	21.25"	8"	—	P00576,P00941
550016†	Shock	—	—	S4	XP4	12.63"	20.38"	7.75"	—	P01136
550017†	Shock	—	—	XP12	L1	17.75"	20.13"	2.38"	—	None
550018†	Shock	—	—	S4	LS26	12.5"	20"	7.5"	—	P01136,P01344
550051†	Shock	—	—	S4	L1	12.38"	20"	7.63"	—	P01136,P00576
550055†	Shock	—	—	S4	LS26	12.38"	20.13"	7.75"	—	P01136,P01344
550057†	Shock	—	—	S5	CLEV	19.18"	24.8"	5.62"	—	P00590,P01637
550058†	Shock	—	—	S5	CLEV	16.97"	23.13"	6.16"	—	P01637,P00590
550060	Shock	—	—	LS47	LS47	16.39"	25.54"	9.16"	—	None
550061	Shock	—	—	LS47	LS47	16.02"	26.5"	10.48"	—	None
550062	Shock	—	—	LS27	LS27	17.76"	29.44"	11.96"	—	None
550063	Shock	—	—	LS27	LS27	16.54"	27.19"	10.65"	—	None
550064	Shock	—	—	S5	LS27	15.1"	24.39"	9.29"	—	P01167
552001	Shock	—	—	LS47	LS47	15.82"	24.74"	8.92"	—	None
553001	Shock	—	—	S5	LS53	13.88"	17"	3.13"	—	P01611
553002	Shock	—	—	S1	SPEC	14.63"	21.88"	7.25"	—	None
553003	Shock	—	—	S4	SPEC	10.83"	17.91"	7.08"	—	None
553004†	Strut	SS2	13.27"	—	—	13.77"	17.99"	4.22"	—	P01614
553005	Strut	B4	15.64"	—	—	14.75"	22.98"	8.23"	—	P00762
553006	Strut	B4	15.64"	—	—	14.75"	22.34"	7.59"	—	P00762
553007	Strut	B4	12.72"	—	—	13.22"	17.94"	4.72"	—	P00808
553010	Strut	B10	11.3"	—	—	11.8"	19.86"	8.06"	—	P00590
553011	Strut	B10	11.3"	—	—	11.8"	19.86"	8.06"	—	P00590

† Bumper Stop Unit. Dimension Shown at Bumper Contact

‡ Hydraulic Lockout Unit. Dimension Shown is Metal-to-Metal, Subtract Approximately 5/8" (.62) from the Extended Length for Start-of-Engagement.

MOUNTING & LENGTH SPECIFICATIONS

Part No.	Part Type	STRUT BODY		END CODE		LENGTHS			Spring (Rate)	Parts Pack(s)
		Type	Length	Upper	Lower	Comp.	Ext.	Trav.		
553012	Strut	B11	13.8"	—	—	14.3"	21.18"	6.88"	—	P01697
553013	Strut	B11	13.8"	—	—	14.3"	21.18"	6.88"	—	P01697
553014†	Strut	SS4	19.53"	—	—	20.22"	25.6"	5.28"	—	P01522
553015†	Strut	B17	9.64"	—	—	10.14"	16.68"	6.54"	—	P00590
553016†	Strut	B9	12.81"	—	—	13.31"	19.67"	6.36"	—	None
553017†	Strut	B9	12.81"	—	—	13.31"	19.67"	6.36"	—	None
553018	Strut	SS2	11.76"	—	—	12.26"	16.65"	4.39"	—	None
553019	Strut	B10	12.81"	—	—	13.31"	18.2"	4.89"	—	None
553020	Strut	B10	12.81"	—	—	13.31"	18.2"	4.89"	—	None
553021	Strut	SS2	11.76"	—	—	12.26"	16.65"	4.39"	—	None
553022†	Strut	B17	10.85"	—	—	11.35"	19.69"	8.34"	—	P00590
553023†	Strut	B10	15.56"	—	—	16.06"	23.21"	7.15"	—	P00590
553024	Strut	B9	11.3"	—	—	11.8"	22.33"	10.53"	—	P00590
553025	Strut	B9	11.3"	—	—	11.8"	22.33"	10.53"	—	P00590
555001†	Shock	—	—	S4	S4	7.88"	11.88"	4"	—	P01134
555002	Shock	—	—	L1	L1	8.63"	12.75"	4.13"	—	P01221
555003	Shock	—	—	L1	L1	9.63"	14.75"	5.13"	—	P01221
555004	Shock	—	—	L1	L1	11.25"	17.88"	6.63"	—	P01221
555009	Shock	—	—	XP7	LS47	14"	22.38"	8.38"	—	None
555010	Shock	—	—	S5	LS15	13.5"	22.13"	8.63"	60	P01167
555011	Shock	—	—	L2	LS39	14.63"	24.13"	9.5"	—	None
555014‡	Shock	—	—	L1	LS39	15"	23.38"	8.38"	—	None
555020	Shock	—	—	S5	LS38	13.5"	22.5"	9"	60	P01167
555025†	Shock	—	—	S4	S4	8.63"	13.5"	4.88"	—	P01134
555031†	Shock	—	—	S5	L1	10"	14.88"	4.88"	—	P01167
555032	Shock	—	—	S5	LS26	13.25"	22"	8.75"	—	P01167
555033†	Shock	—	—	S5	LS38	10.63"	16"	5.38"	—	P01167
555034	Shock	—	—	S5	LS38	13.63"	22.5"	8.88"	—	P01167
555035	Shock	—	—	LS37	LS37	9.88"	14.88"	5"	—	None
555036†	Shock	—	—	LS39	LS39	15"	24.63"	9.63"	—	None
555037	Shock	—	—	S5	XP8	10.13"	15.63"	5.5"	—	P01167
555038	Shock	—	—	LS39	LS39	12.88"	21"	8.13"	—	None
555043	Shock	—	—	S4	S4	12.43"	20.88"	8.45"	—	P01134
555944	Steering Damper	—	—	S4	L1	13.75"	23.38"	9.63"	—	P00837,P01098
555949	Steering Damper	—	—	L1	L1	17.13"	29.38"	12.25"	—	P00576,P01013
557001	Shock	—	—	LS54	LS54	17.38"	29.13"	11.75"	—	P01232
557002	Shock	—	—	LS54	LS54	16.88"	27.63"	10.75"	—	None
557003	Shock	—	—	LS53	LS37	10.63"	15.75"	5.13"	—	P01234
557004	Shock	—	—	LS47	LS47	14"	22"	8"	—	None
557007	Shock	—	—	LS54	LS54	16"	25.63"	9.63"	—	None
557011‡	Shock	—	—	LS39	LS54	15.25"	23.88"	8.63"	—	None
557012‡	Shock	—	—	LS54	LS54	13.63"	20.5"	6.88"	—	None
557023‡	Shock	—	—	LS54	LS54	15.38"	23.88"	8.5"	—	None
557031	Shock	—	—	LS54	LS54	16.38"	27"	10.63"	—	None
557032	Shock	—	—	LS54	S6	13.63"	22"	8.38"	—	P01482
557039	Shock	—	—	LS86	LS86	14.04"	21.49"	7.45"	—	None
557044‡	Shock	—	—	S5	LS39	14.43"	22.39"	8.96"	—	P01167
557045‡	Shock	—	—	S5	LS39	14.43"	23.39"	8.96"	—	P01167
557046	Shock	—	—	LS59	LS60	14.7"	22.79"	8.09"	—	None
SC2911	Steering Damper	—	—	L1	L1	13.84"	23.27"	9.43"	—	P01198
SC2912	Steering Damper	—	—	S4	S4	12.63"	21.88"	9.25"	—	P01098
SC2913	Steering Damper	—	—	L1	L1	14.15"	23.99"	9.88"	—	P00837,P00576
SC2914	Steering Damper	—	—	L1	S4	12.75"	21.5"	8.75"	—	P01034,P00576,P01098
SC2915	Steering Damper	—	—	L1	L1	12.13"	19.88"	7.75"	—	P00848
SC2916	Steering Damper	—	—	L1	L1	13.25"	22.25"	9"	—	P00848
SC2917	Steering Damper	—	—	L1	L1	11.66"	18.7"	7.05"	—	P00848
SC2920	Steering Damper	—	—	SPEC	SPEC	16"	26.69"	10.69"	—	None
SC2921	Steering Damper	—	—	SPEC	SPEC	16.61"	27.94"	11.33"	—	None
SC2922	Steering Damper	—	—	LS14	L1	15.38"	26.38"	11"	—	P00837
SC2928	Steering Damper	—	—	L1	LS37	12"	19.5"	7.5"	—	P00837
SC2937	Steering Damper	—	—	L1	LS4	12"	19.5"	7.5"	—	P00848,P00837

† Bumper Stop Unit. Dimension Shown at Bumper Contact

‡ Hydraulic Lockout Unit. Dimension Shown is Metal-to-Metal, Subtract Approximately 5/8" (.62) from the Extended Length for Start-of-Engagement.

MOUNTING & LENGTH SPECIFICATIONS


Part No.	Part Type	STRUT BODY		END CODE		LENGTHS			Spring (Rate)	Parts Pack(s)
		Type	Length	Upper	Lower	Comp.	Ext.	Trav.		
SC2939	Steering Damper	—	—	LS22	LS2	11.63"	19.13"	7.5"	—	None
SC2940	Steering Damper	—	—	S4	L1	10.63"	17.38"	6.75"	—	P00843,P01098
SC2941	Steering Damper	—	—	LS23	LS22	11.5"	17.63"	6.13"	—	None
SC2942	Steering Damper	—	—	L1	LS4	12.25"	20.13"	7.88"	—	P00837
SC2943	Steering Damper	—	—	LS2	LS2	11.75"	19.13"	7.38"	—	None
SC2946	Steering Damper	—	—	L1	L1	16.5"	25.63"	9.13"	—	P01034
SC2947	Steering Damper	—	—	LS2	L1	15.38"	23.63"	8.25"	—	P01034
SC2948	Steering Damper	—	—	LS2	L1	12.5"	19.88"	7.38"	—	P01034
SC2953	Steering Damper	—	—	L1	LS24	13.75"	23"	9.25"	—	P00837
SC2954	Steering Damper	—	—	L1	LS2	17.88"	26.5"	8.63"	—	P01034
SC2955	Steering Damper	—	—	LS26	LS26	13"	21.38"	8.38"	—	None
SC2956	Steering Damper	—	—	LS4	LS4	13.88"	23.25"	9.38"	—	None
SC2957	Steering Damper	—	—	L1	L1	17"	26.88"	9.88"	—	P01034
SC2960	Steering Damper	—	—	LS24	LS24	13.63"	22.63"	9"	—	None
SC2961	Steering Damper	—	—	L1	LS38	14.5"	24.38"	9.88"	—	P00847
SC2962	Steering Damper	—	—	LS5	LS24	12.75"	20.75"	8"	—	P01326
SC2963	Steering Damper	—	—	L1	LS35	12.5"	20.63"	8.13"	—	P01368
SC2964	Steering Damper	—	—	L1	LS24	14"	23.5"	9.5"	—	P01368
SC2965	Steering Damper	—	—	S4	L1	15.63"	27.38"	11.75"	—	P01385,P01134
SC2966	Steering Damper	—	—	LS24	LS24	17.33"	29.77"	12.44"	—	None
SC2967	Steering Damper	—	—	LS26	L1	16.11"	27.79"	11.68"	—	P01385
SC2968	Steering Damper	—	—	LS37	LS37	14.05"	23.32"	9.27"	—	None
SC2969	Steering Damper	—	—	L1	LS23	13.69"	22.96"	9.27"	—	P01368
SC2970	Steering Damper	—	—	LS37	LS37	13.22"	20.65"	7.43"	—	None
SC2973	Steering Damper	—	—	LS28	LS39	14.54"	24.04"	9.5"	—	None

† Bumper Stop Unit. Dimension Shown at Bumper Contact

‡ Hydraulic Lockout Unit. Dimension Shown is Metal-to-Metal, Subtract Approximately 5/8" (.62) from the Extended Length for Start-of-Engagement.


Specifications — Shock Mount Codes

Mount Code	Sleeve ID (A)	Sleeve OAL (B)	Mount Code	Sleeve ID (A)	Sleeve OAL (B)	Mount Code	Sleeve ID (A)	Sleeve OAL (B)
LS1	10MM	15/16"	LS49	5/8"-16MM	1 3/16"	LS97	1/2"	2 3/4"
LS2	10MM	1"	LS50	5/8"-16MM	1 1/2"	LS98	5/8"-16MM	3"
LS3	10MM	1 1/4"	LS51	5/8"-16MM	1 9/16"	LS99	5/8"-16MM	3 1/4"
LS4	10MM	1 3/8"	LS52	5/8"-16MM	1 11/16"	LS100	1 1/8"	4"
LS5	10MM	1 7/16"	LS53	5/8"-16MM	2"	LS101	1 1/8"	2 5/8"
LS6	10MM	1 9/16"	LS54	3/4"	1 3/4"	LS102	7/8"	2 1/4"
LS7	10MM	1 5/8"	LS55	18MM	1 5/8"	LS103	1/2"	3 3/4"
LS8	10MM	2"	LS56	20MM	1 9/16"	LB1	1/2"	3/4"
LS9	10MM	2 1/8"	LS57	20MM	2"			
LS10	10MM	2 3/8"	LS58	20MM	2 7/16"			
LS11	10MM	3"	LS59	3/4"	3 13/16"			
LS12	7/16"	1 1/4"	LS60	3/4"	3 3/16"			
LS13	7/16"	1 5/16"	LS61	5/8"-16MM	4"			
LS14	7/16"	1 3/8"	LS62	5/8"-16MM	2 9/16"			
LS15	7/16"	1 7/16"	LS63	1/2"	1/2"			
LS16	7/16"	1 5/8"	LS64	21MM	1 5/16"			
LS17	7/16"	1 7/8"	LS65	1"	2"			
LS18	7/16"	2 1/8"	LS66	3/4"	1 3/8"			
LS19	7/16"	3 3/16"	LS67	3/4"	1 11/16"			
LS20	7/16"	3 3/8"	LS68	3/4"	1 7/8"			
LS21	12MM	1"	LS69	3/4"	1 5/16"			
LS22	12MM	1 1/8"	LS70	3/4"	2 1/4"			
LS23	12MM	1 1/4"	LS71	3/4"	2 3/4"			
LS24	12MM	1 3/8"	LS72	7/16"	2"			
LS25	12MM	1 7/16"	LS73	7/16"	2 1/2"			
LS26	12MM	1 1/2"	LS74	12MM	1 11/16"			
LS27	12MM	1 9/16"	LS75	20MM	1 3/4"			
LS28	12MM	1 5/8"	LS76	1/2"	2 3/8"			
LS29	12MM	1 3/4"	LS77	1/2"	2 7/16"			
LS30	12MM	1 7/8"	LS78	9/16"	1 1/2"			
LS31	12MM	2"	LS79	5/8"-16MM	1 3/8"			
LS32	12MM	2 1/8"	LS80	5/8"-16MM	1 3/4"			
LS33	12MM	2 5/16"	LS81	5/8"-16MM	1 7/8"			
LS34	12MM	2 7/8"	LS82	5/8"-16MM	1 1/2"			
LS35	1/2"	1 1/4"	LS83	18MM	2"			
LS36	1/2"	1 5/16"	LS84	12MM	2 3/8"			
LS37	1/2"	1 3/8"	LS85	5/8"-16MM	1 3/16"			
LS38	1/2"	1 1/2"	LS86	3/4"	2 5/16"			
LS39	1/2"	1 5/8"	LS87	5/8"-16MM	3 9/16"			
LS40	1/2"	1 11/16"	LS88	14MM	2 7/16"			
LS41	1/2"	2 1/4"	LS89	1"	1 3/4"			
LS42	14MM	1 5/16"	LS90	14MM	2 5/8"			
LS43	14MM	1 9/16"	LS91	14MM	1 3/4"			
LS44	14MM	1 7/8"	LS92	14MM	1 11/16"			
LS45	14MM	2 7/16"	LS93	18MM	3 1/4"			
LS46	14MM	3 1/8"	LS94	5/8"-16MM	2 3/4"			
LS47	9/16"	1 5/8"	LS95	20MM	2 3/8"			
LS48	9/16"	2 7/16"	LS96	1/2"	1 7/8"			




Specifications – Shock Mount Codes


Stem Mount Code	Sleeve Length	Thread Pitch
S1	1 $\frac{3}{16}$ "	M10
S12	1 $\frac{3}{16}$ "	M10
S15	2 $\frac{5}{8}$ "	M10
S2	2"	M12
S3	2"	3/8"-24
S33	2"	3/8"-24
S34	2 $\frac{1}{4}$ "	3/8"-24
S4	2 $\frac{3}{8}$ "	3/8"-16
S42	2 $\frac{3}{8}$ "	3/8"-16
S5	2 $\frac{5}{8}$ "	1/2"-13
S51	2 $\frac{5}{8}$ "	1/2"-13
S52	2 $\frac{5}{8}$ "	1/2"-20
S6	3 $\frac{5}{16}$ "	5/8"-11
S61	3 $\frac{5}{16}$ "	5/8"-11
S62	2 $\frac{1}{2}$ "	5/8"-18
S7	1 $\frac{1}{8}$ "	M8




Cross Pin Mount Code	X.Pin End Type	X.Pin Hole Diameter	X.Pin Length (Cntr to Cntr)
XP1	Open	5/16"	2 $\frac{3}{16}$ "
XP2	Open	5/16"	2 $\frac{3}{8}$ "
XP3	Open	5/16"	2 $\frac{7}{16}$ "
XP4	Closed	5/16"	2 $\frac{7}{16}$ "
XP5	Closed	5/16"	2 $\frac{1}{2}$ "
XP6	Open	5/16"	2 $\frac{3}{4}$ "
XP7	Closed	5/16"	2 $\frac{7}{8}$ "
XP8	Open	5/16"	3"
XP9	Open	5/16"	3 $\frac{5}{8}$ "
XP10	Open	3/8"	2 $\frac{5}{8}$ "
XP11	Closed	3/8"	2 $\frac{3}{4}$ "
XP12	Open	3/8"	3 $\frac{3}{16}$ "
XP13	Closed	12MM	2 $\frac{15}{16}$ "
XP14	Closed	1/2"	3 $\frac{3}{8}$ "
XP15	Closed	1/2"	3 $\frac{3}{4}$ "
XP16	Closed	3/8"	4"

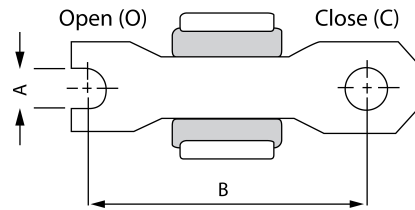


Loop Mount Code	Bushing ID (A)	Bushing OAL (B)
L1	5/8"	1 $\frac{5}{16}$ "
L2	11/16"	1 $\frac{9}{16}$ "
L3	3/4"	1 $\frac{9}{16}$ "
L4	1"	1 $\frac{3}{4}$ "
L5	1 $\frac{1}{4}$ "	2 $\frac{9}{16}$ "
L6	1/2"	3/4"



Cantilever Mount Code	Stud Diameter (A)	Stud Length (B)
CP1	1/2"	1 $\frac{1}{16}$ "
CP2	1/2"	1 $\frac{3}{16}$ "
CP3	1/2"	1 $\frac{5}{16}$ "
CP4	1/2"	1 $\frac{1}{2}$ "
CP5	5/8"	1 $\frac{5}{16}$ "
CP5	5/8"	1 $\frac{5}{16}$ "

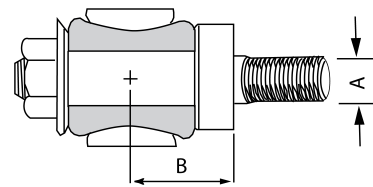


Special Mount	Mount Description
CLEV	Clevis Bracket Mount
SPEC	Special Mount
SP	Stud Plate Mount




Specifications

REPLACEMENT CARTRIDGE DIMENSIONING DIMENSION DE LA CARTOUCHE DE REMPLACEMENT DIMENSIONES DEL CARTUCHO DE REPUESTO

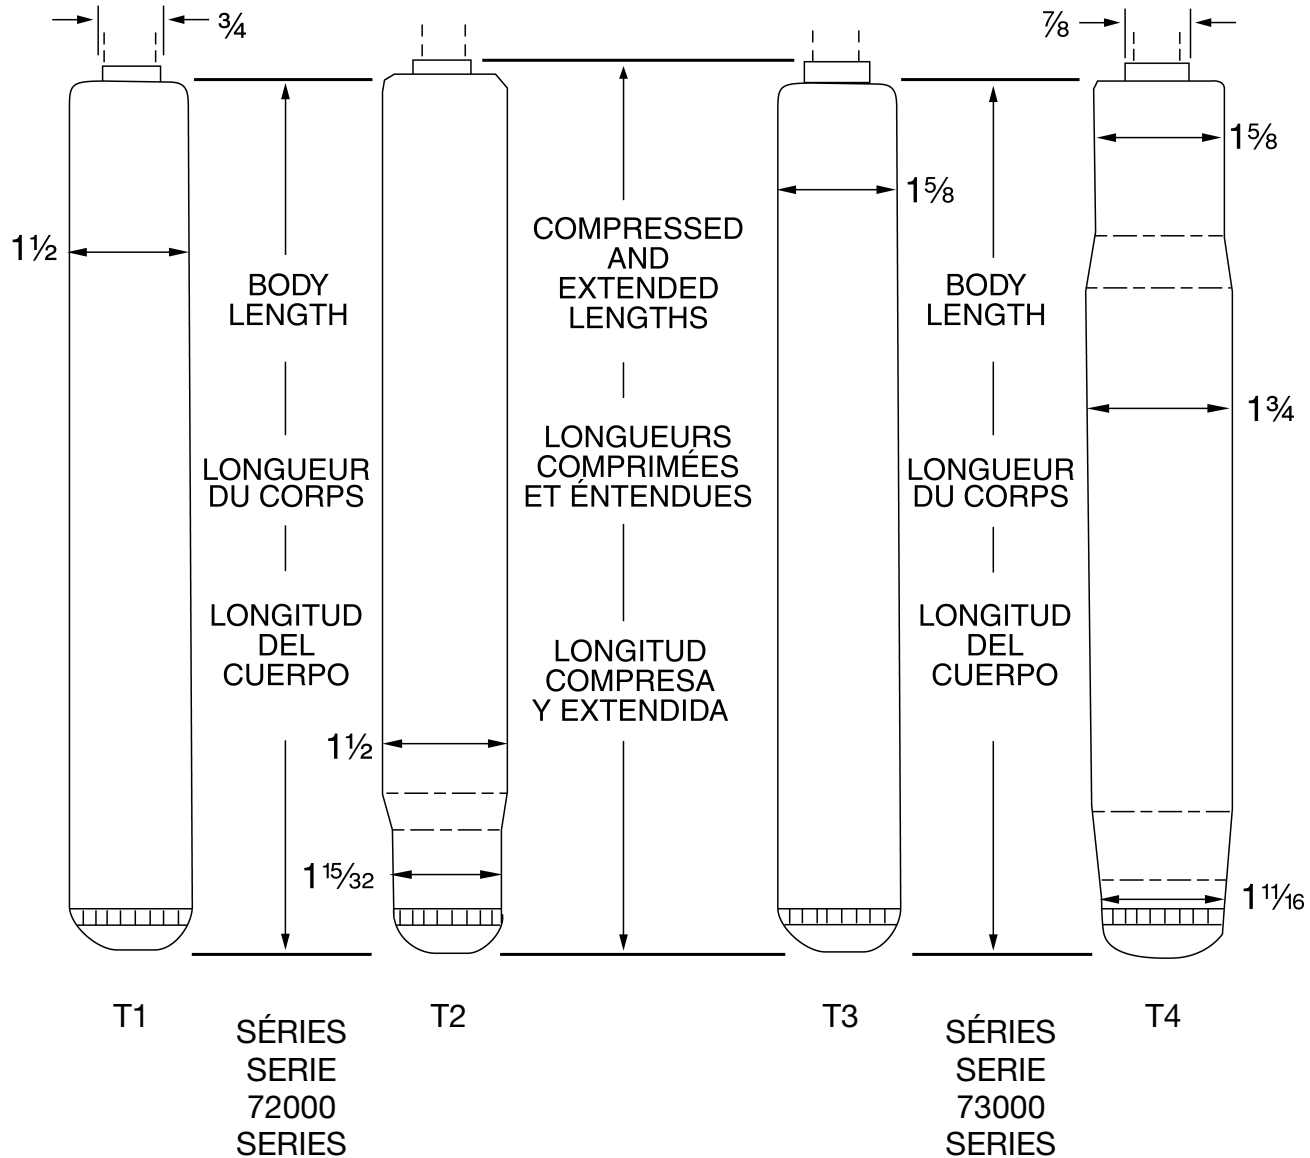

Product specifications shown in this catalog are subject to change without notice.
Les données techniques des produits de ce catalogue peuvent être modifiées sans préavis.
Las especificaciones de los productos en este catálogo están sujetas a cambio sin previo aviso.

MOUNTING & LENGTH CHARTS REPLACEMENT UNITS MONTAGE ET LONGUEUR DES UNITÉS DE REMPLACEMENT TABLAS DE MONTAJE Y LONGITUD DE LAS UNIDADES DE REPUESTO

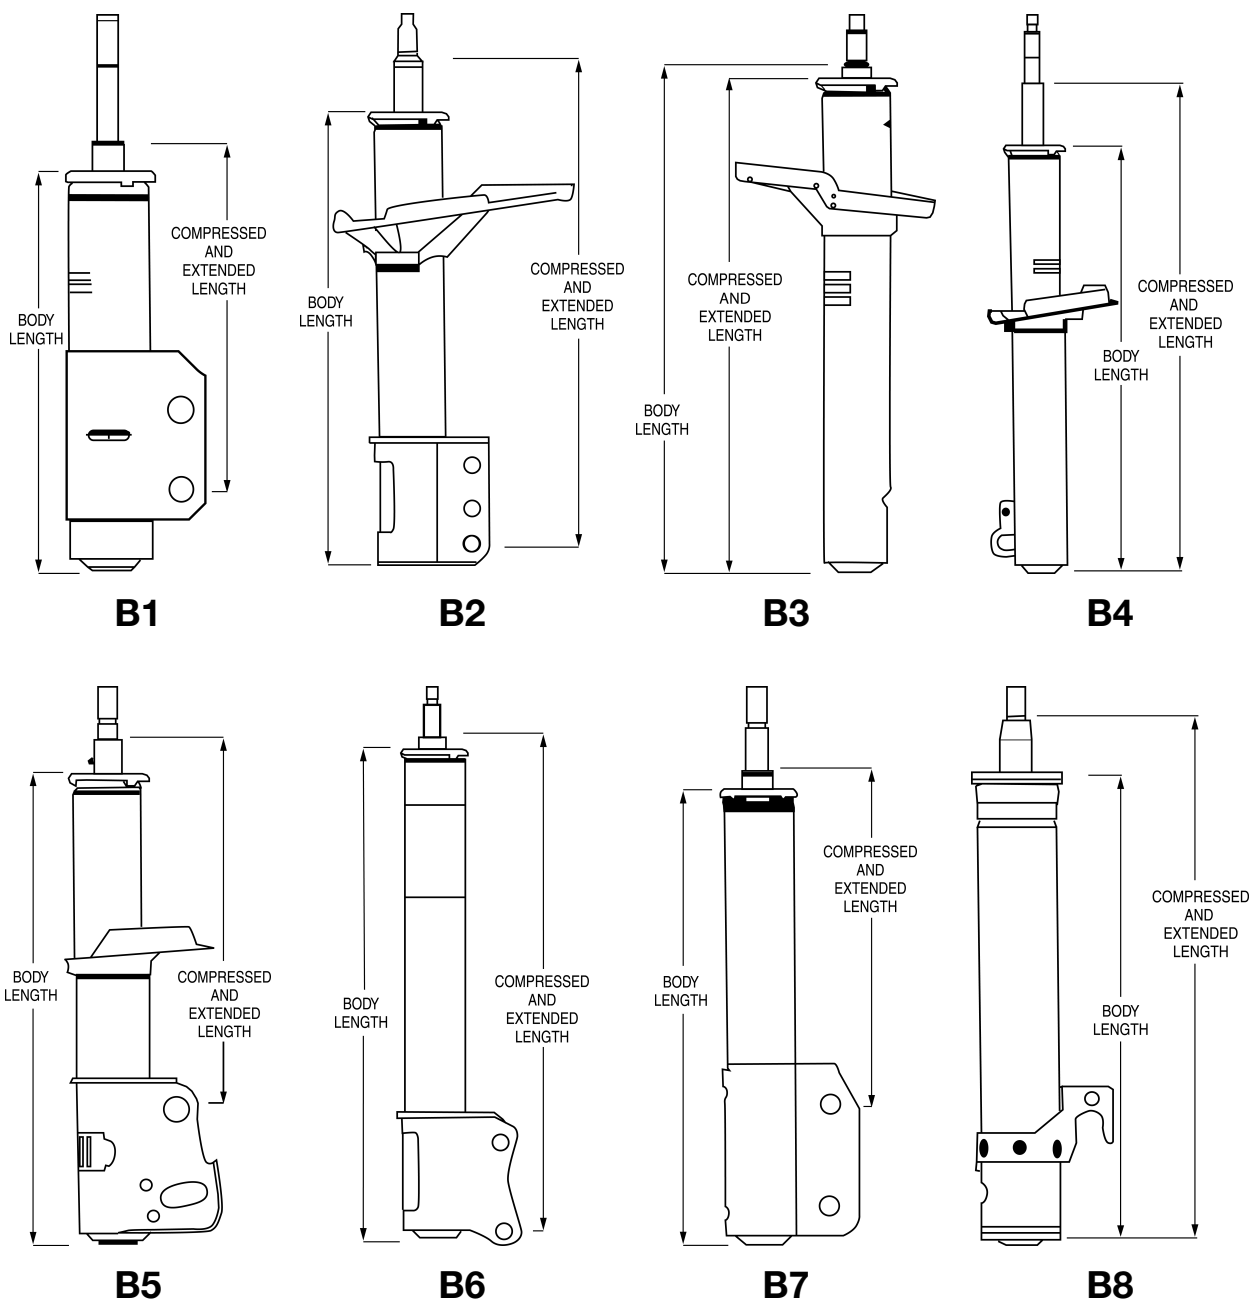

BODY LENGTH / LONGUEUR DU CORP / LONGITUD DEL CUERPO.

COMPRESSED AND EXTENDED LENGTH / LONGUEUR COMPRIMÉE ET ÉTENDUE / LONGITUD COMPRIMIDA Y EXTENDIDA.

NOTE/NOTA:


All Piston Rod Ends are Designed Special For Each Application.

Chaque extrémité de tige de piston est conçue spécialement pour chaque application.

Todos los extremos de la varas del pistón están diseñadas especialmente para cada aplicación.

Specifications

MOUNTING & LENGTH CHARTS REPLACEMENT UNITS MONTAGE ET LONGUEUR DES UNITÉS DE REMPLACEMENT TABLAS DE MONTAJE Y LONGITUD DE LAS UNIDADES DE REPUESTO

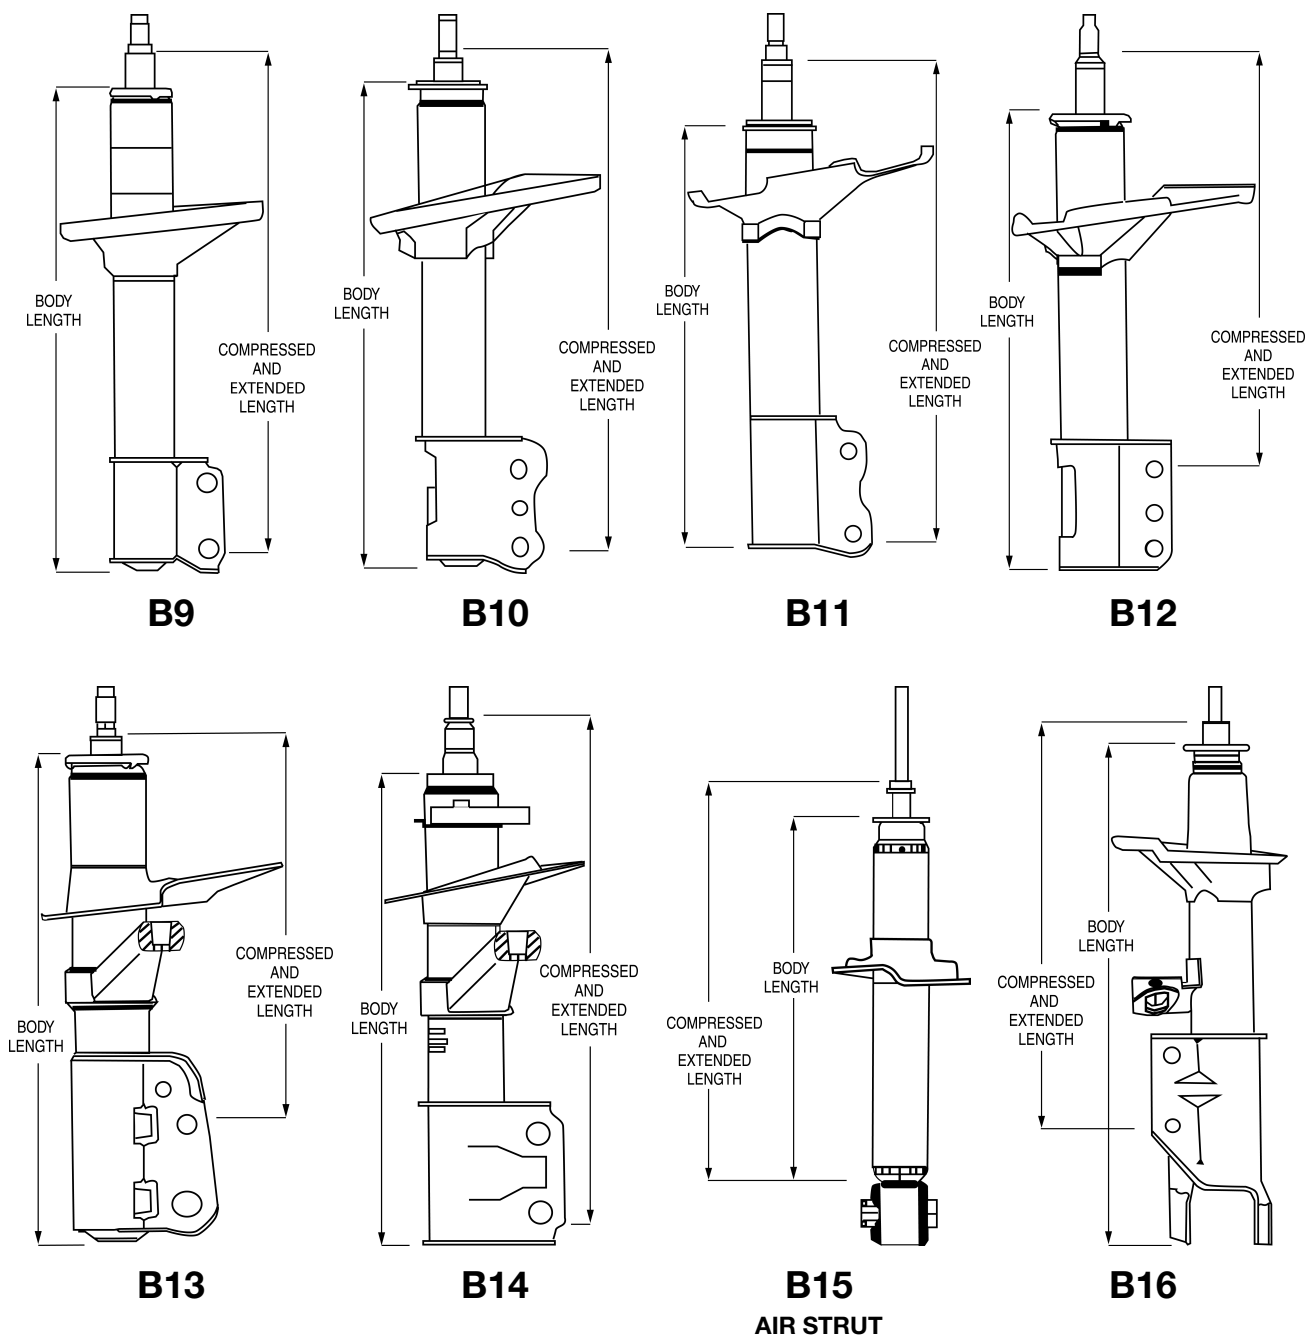

BODY LENGTH / LONGUEUR DU CORP / LONGITUD DEL CUERPO.

COMPRESSED AND EXTENDED LENGTH / LONGUEUR COMPRIMÉE ET ÉTENDUE / LONGITUD COMPRIMIDA Y EXTENDIDA.


NOTE/NOTA:

All Piston Rod Ends are Designed Special For Each Application.


Chaque extrémité de tige de piston est conçue spécialement pour chaque application.

Todos los extremos de la varas del pistón están diseñadas especialmente para cada aplicación.


MOUNTING & LENGTH CHARTS REPLACEMENT UNITS MONTAGE ET LONGUEUR DES UNITÉS DE REMPLACEMENT TABLAS DE MONTAJE Y LONGITUD DE LAS UNIDADES DE REPUESTO

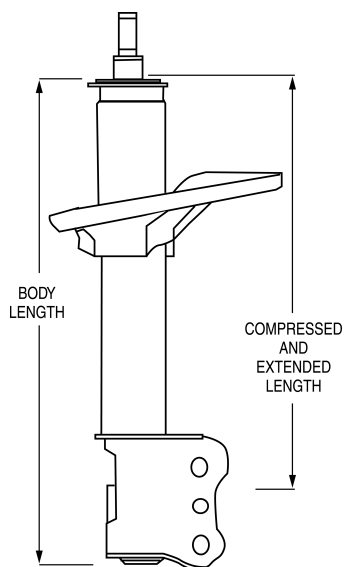


B17

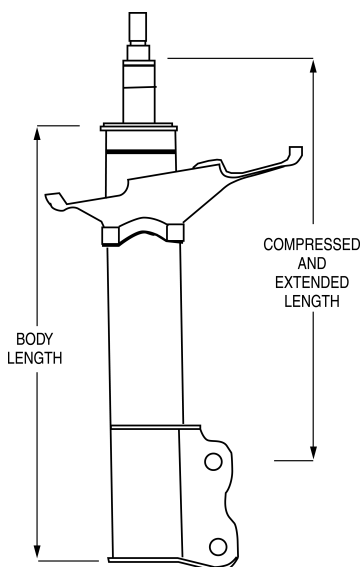

B18

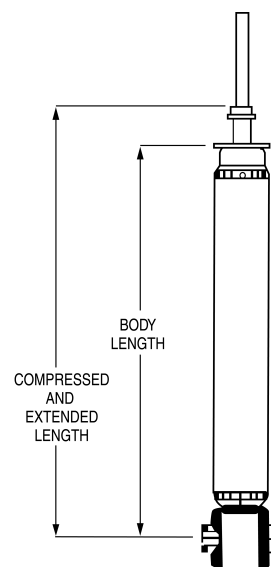


SS1

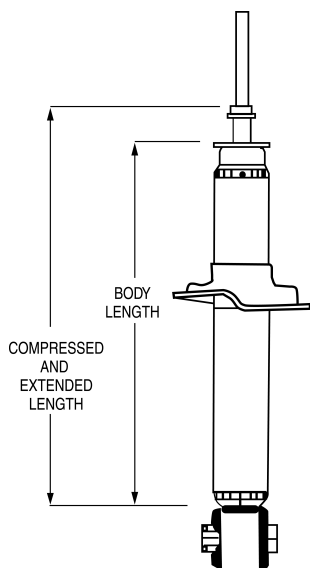


SS2

SS3 w/Dirt Shield Not Shown

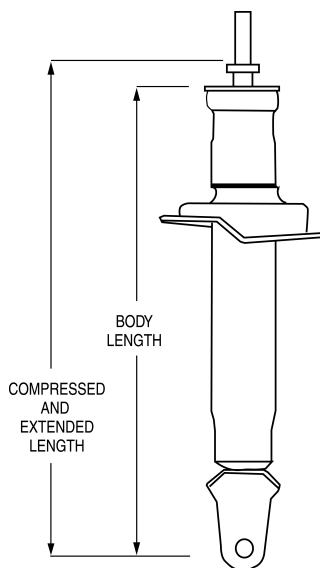

SS4

SS5 w/Dirt Shield Not Shown

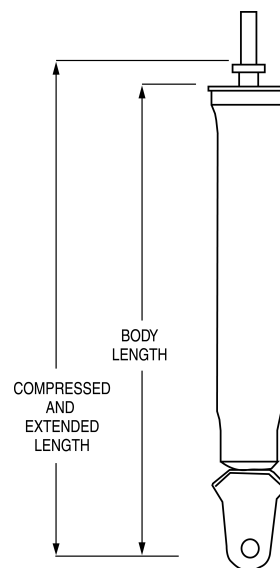

SS6

BODY LENGTH / LONGUEUR DU CORP / LONGITUD DEL CUERPO.

COMPRESSED AND EXTENDED LENGTH / LONGUEUR COMPRIMÉE ET ÉTENDUE / LONGITUD COMPRIMIDA Y EXTENDIDA.


NOTE/NOTA:

All Piston Rod Ends are Designed Special For Each Application.

Chaque extrémité de tige de piston est conçue spécialement pour chaque application.

Todos los extremos de la varas del pistón están diseñadas especialmente para cada aplicación.

MAX-LIFT®
LENGTH DIMENSIONING
DIMENSIONS DE LA LONGUEUR
MEDIDAS DE LONGITUD

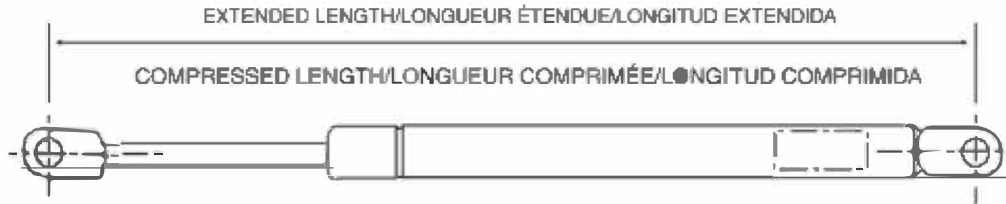

END MOUNTING CODES
CODES DE MONTAGE
CÓDIGOS DE MONTAJE

